





MODEL EMRI-3 READER INTERFACE BOARD


The **Entry-Master® EMRI-3 Board** is used in conjunction with the **Entry-Master v5.1.2** web-based card access system. It is a fully distributed board, with a cardholder capacity of 60,000 cardholders, and buffers 5,000 transactions, and connects via TCP/IP to the host-based **EMC-64** web-enabled access control panel (EMRI-3N model only). It can also function via RS-485 connections to ensure compatibility with legacy wiring schemes. Each **EMRI-3** board can control 2 doors, with a total of 16 inputs and 10 outputs per board. The board can control 10 floors, when used for Elevator Control. Input & outputs are individually programmable with the Entry-Master web-based software.

EMRI-3 Electrical Specifications

- **Models:**
EMRI-3N is Networked (Ethernet)
EMRI-3W is Non-Networked (RS-485)
- **Input Power:**
12-24 VAC 20VA transformer
- **Output Power:**
12 VDC – 2.1 Amps
- **Temperature Range:**
0°C to 40°C, Humidity 0% to 95% non-condensing
- **Communications:**
RS-485, 9,600 – 115,200 Baud
TCP/IP (Ethernet)
- **Connections:**
9-pin "D" type and 5mm Phoenix connectors
Inputs: 12 digital, 4 analog
Outputs: 4 Relay, 6 Transistor
- **Enclosure (single board only):**
8.0(h) x 7.0(w) x 3.5(d) inches

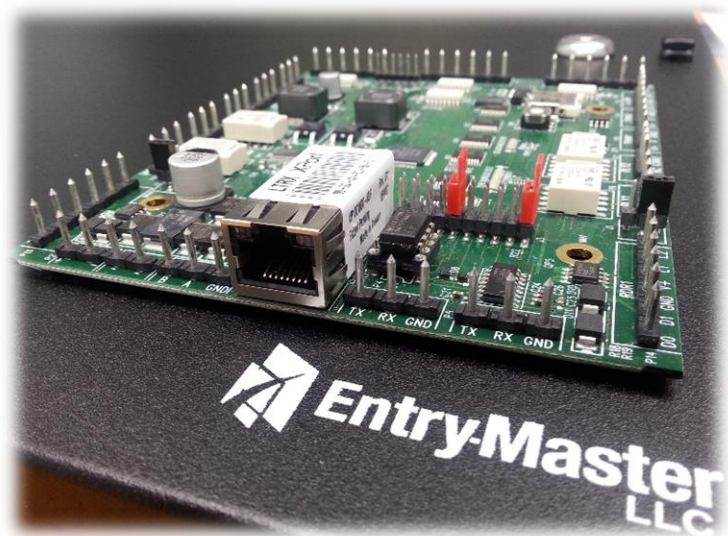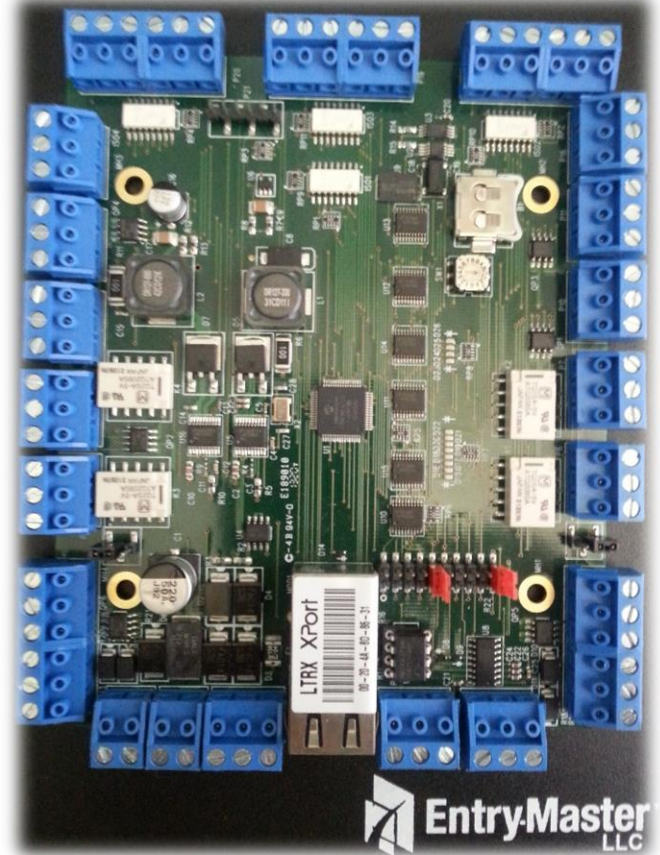

EMRI-3 Reader Interface Wiring Schematic

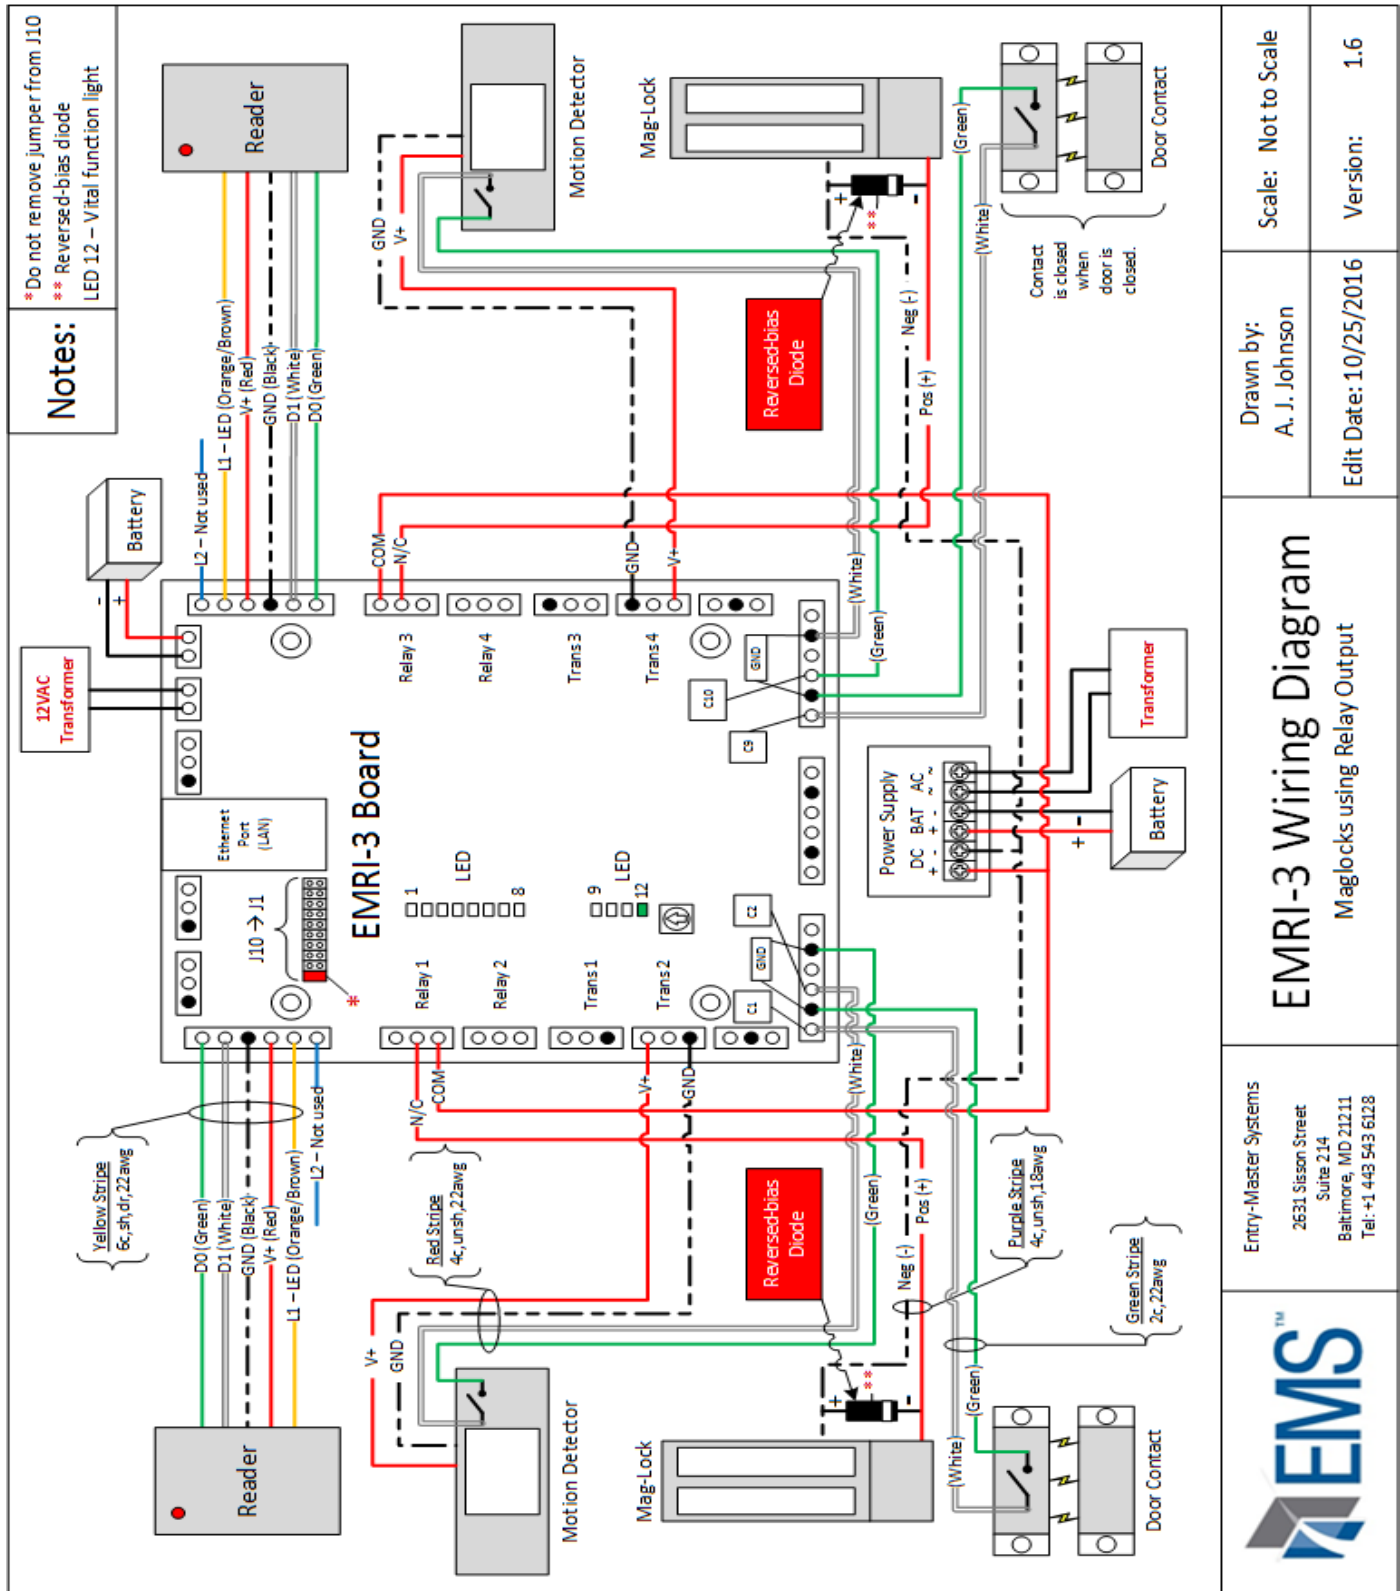

<p>EMRI-3 Wiring Diagram Maglocks using Relay Output</p>	<p>Scale: Not to Scale</p>
	<p>Version: 1.6</p>
<p>Entry-Master Systems 2631 Sisson Street Suite 214 Baltimore, MD 21211 Tel: +1 443 543 6128</p>	<p>Drawn by: A. J. Johnson</p>
<p>EMMS™</p>	<p>Edit Date: 10/25/2016</p>